# **Diaphragm Pumps for Air, Gases and Vapours**







# Series LABOPORT® N 811 K\_.18 Pumps

# LABOPORT® Mini Diaphragm Vacuum Pumps and Compressors

## **Technical features:**

- 100% oil-free transfer
- Pure transfer, evacuation and compression
- Version for slightly aggressive or corrosive gases and vapours
- Maintenance-free
- Environmentally friendly
- High level of gas tightness.

Series N 811 diaphragm pumps are single-head, dry-running devices used in a wide range of laboratory applications. They transfer, compress and pump down without contamination. The heart of these very compact pumps is a KNF structured diaphragm. This patented diaphragm was stress-optimized using the Finite Elements method. As a result, we were able to make the pumps smaller while increasing the service life of the diaphragm.

The pumps are available in various versions differing in the materials which contact the media.

# Material in contact with the pumped media

Type/Order No. Pump head		Diaphragm	Valves
N 811 KN.18	PPS	EPDM	FPM
N 811 KT.18	PPS	PTFE-coated	FFPM

Technical data:	N 811 KN.18	N 811 KT.18	
Delivery (I/min) <sup>1</sup>	11.5	11.5	
Ultimate vacuum (mbar abs.)	240	290	
Operating pressure (bar g)	2	2	
Connectors for tube (mm)	ID 6	ID 6	
Permissible gas and			
ambient temperature	+5+40 °C	+5+40 °C	
Mains	230V/50Hz	230V/50Hz	
Motor protection	IP 20	IP 20	
Power P <sub>1</sub>	65 W	65 W	
Operating current	0.8 A	0.8 A	
Weight	2.5 kg	2.5 kg	
Dimensions LxHxW (mm)	187/157/90	187/157/90	
With thermal switch and power fuse			

Motors with other voltages and frequencies on request.


<sup>1)</sup> at atm. pressure

# **Diaphragm Pumps for Air, Gases and Vapours**




# **Dimensions and performance characteristics**


# Pump down time for 5 I receiver

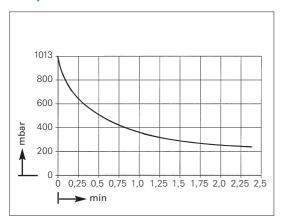

## **Performance characteristics**

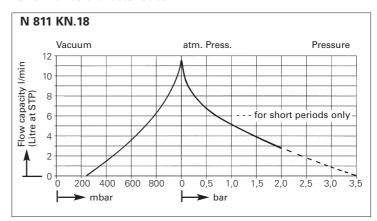

### **Performance characteristics**

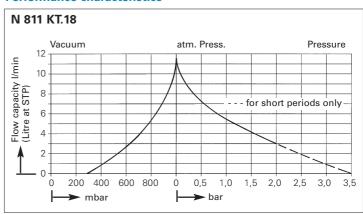

### **Dimensions (mm)**

